




Micro Detectors

Italian Sensors Technology

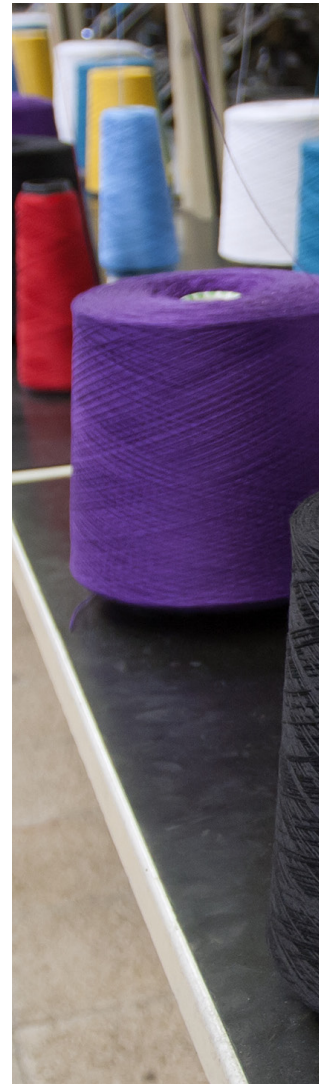

Cylindrical inductive sensor
miniaturized Ø4 AC1



Proximity Sensors
Catalogue

Cod. CAT3EAC1374001

Datasheet - AC1 - english - Ed.01/2014





Products

inductive
miniaturized

Series AC1

inductive
miniaturized

AC1 download area

www.microdetectors.com<http://www.microdetectors.com/ita/prodotti/dettaglioifamiglia.aspx?idfamiglia=37>

market sectors and applications

- plastic industry
- robot industry
- wood industry
- textile industry
- automatic machines
- packaging industry
- electronic components production
- printing industry
- sorting mail machine



features

Extremely reduced models: Ø4 x 30 mm (cable) / 38 mm (plug) lenght

Operating voltage: 10 ÷30 Vdc

Output current: 100 mA

LED output indicator

Totally protected against electrical damages

Cable and M8 plug output

Stainless steel housing

approvals




protection degree

IP67





Products

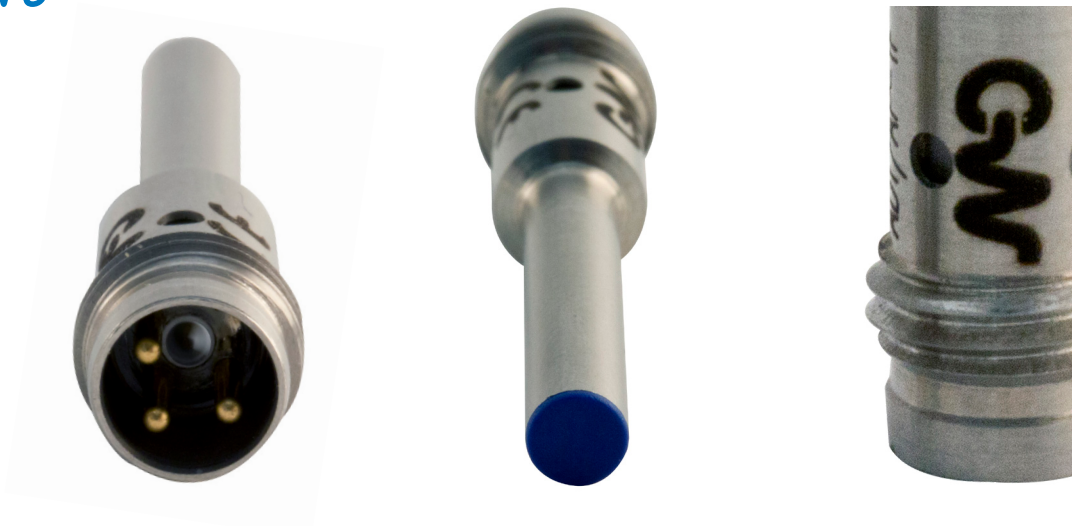inductive
miniaturized

cylindrical inductive sensors Ø4 AC1

Inductive proximity sensors AC1 have a smooth stainless steel housing, Ø4 diameter. Yellow output LED 360° visible. Available 2 m PVC cable models or M8 connector models. The sensors have a **IP 67 protection degree**.

pack content

-

further commercial and technical documents available


High resolution photos

customization already tested

-

minimum quantity that can be ordered

1 piece

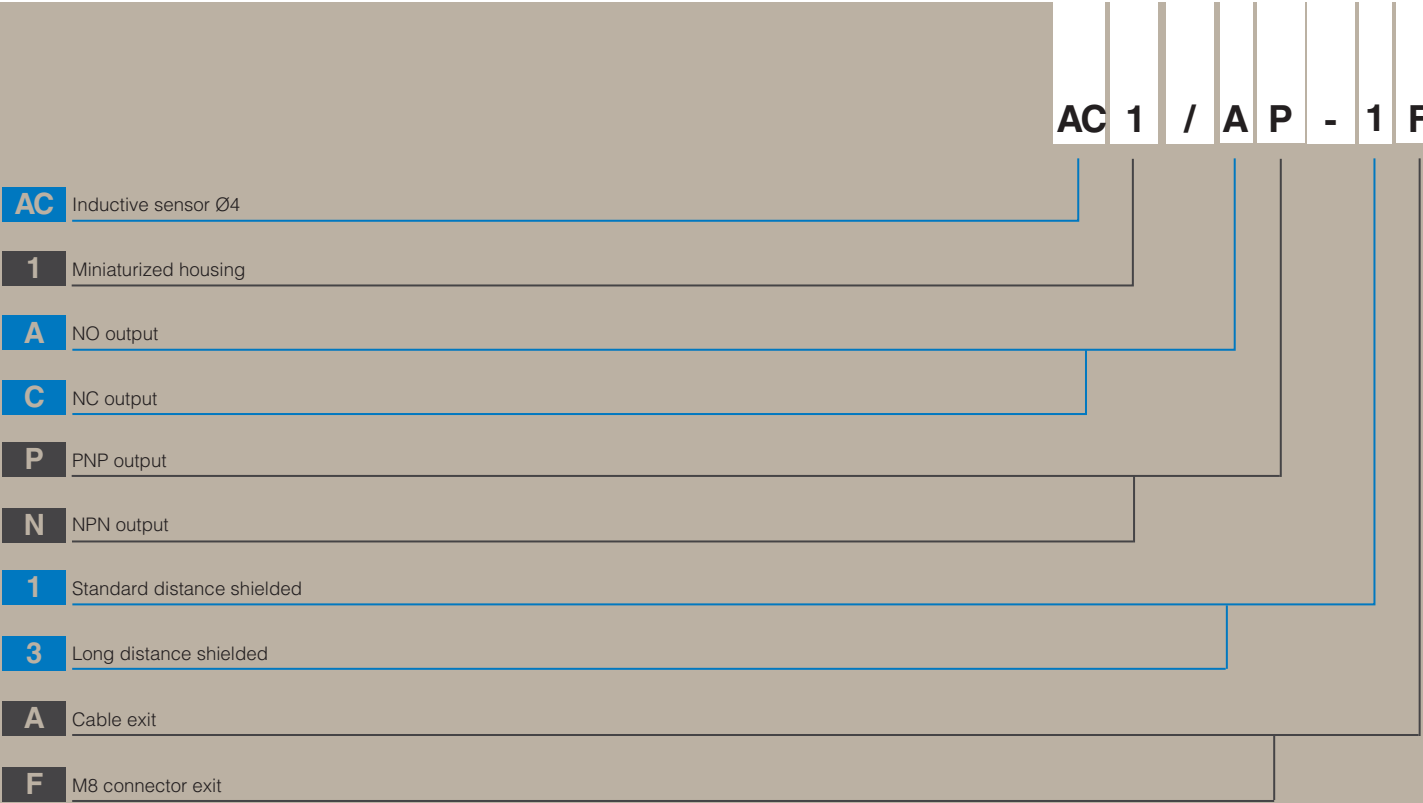

available models

diameter	installation	distance	connection	distance	PNP - NO	NPN - NO	PNP - NC	NPN - NC
Ø4	shield	standard distance	cable	0,8 mm	AC1/AP-1A	AC1/AN-1A	AC1/CP-1A	AC1/CN-1A
			M8 connector		AC1/AP-1F	AC1/AN-1F	AC1/CP-1F	AC1/CN-1F
		long distance	cable	1,5 mm	AC1/AP-3A	AC1/AN-3A	AC1/CP-3A	AC1/CN-3A
			M8 connector		AC1/AP-3F	AC1/AN-3F	AC1/CP-3F	AC1/CN-3F




Products

inductive
miniaturized



technical specifications

according to IEC EN 60947-5-2 and IEC EN 60947-5-7

		
models	AC1/**-1*	AC1/**-3*
		
nominal sensing distance S_n	0,8 mm	1,5 mm
hysteresys	1 ÷ 20%	
standard target	4 x 4 mm	4,5 x 4,5 mm
repeat accuracy	5% @ $U_B = 20 \div 30$ V; $T_a = 23^\circ\text{C} \pm 5^\circ\text{C}$	
operating voltage	10 ÷ 30 Vcc	
ripple	≤ 10 %	
output current	≤ 100 mA	
output voltage drop	≤ 1,5 V @ 100mA	
no-load current	≤ 10 mA	
leakage current	≤ 10 μA	
switching frequency	7 kHz	
time delay before availability	≤ 50 ms	
temperature range	-25°C ÷ +70°C	
thermal drift	≤ 10%	
supply electrical protection	polarity reversal	
output electrical protection	short circuit (auto reset), overvoltage pulses	
EMC compatibility	conforming to EC Directive 2004/108/EC requirements according to EN60947-5-2	
protection degree	IP67	
housing material	stainless steel AISI 303	
active head material	PBT	
reduction factor	see table	
LED indicators	on (yellow LED)	
weight	30 g (cable version); 4g (M8 connector version)	


BN brown
BU blue
BK black

electrical diagrams of connections

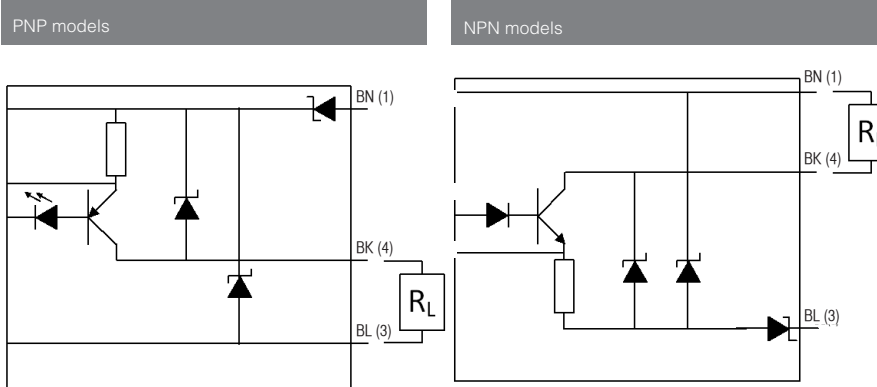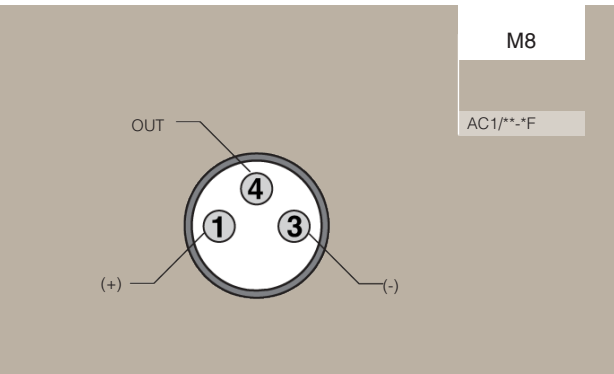


dimensions

AC1/**-*A

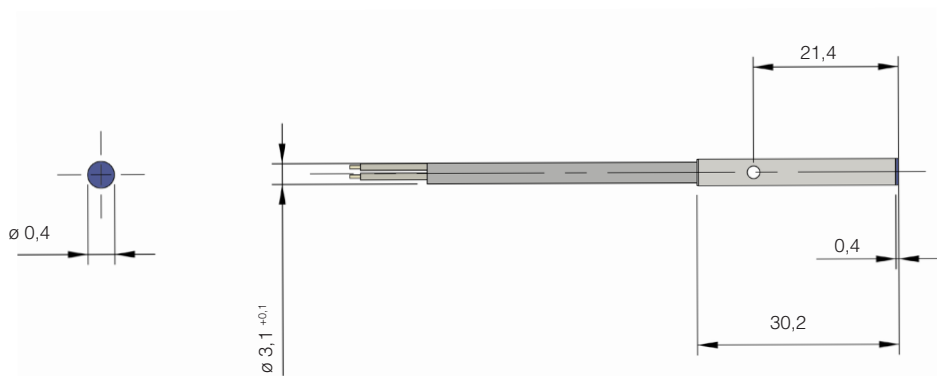

mm

AC1/**-*F

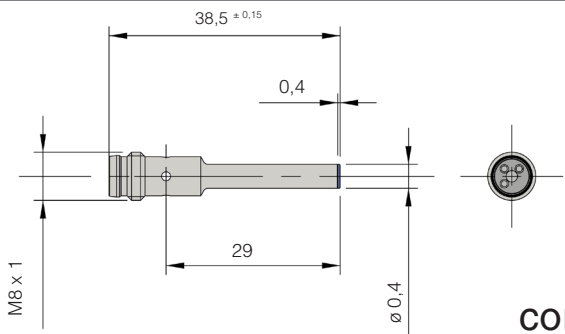


mm

correction factors

model	FE360	copper	aluminium	brass	stainless steel
AC1/xx-1x	1	0,28 ± 10%	0,21 ± 10%	0,32 ± 10%	0,63 ± 10%
AC1/xx-3x	1	0,29 ± 10%	0,23 ± 10%	0,31 ± 10%	0,66 ± 10%

installation

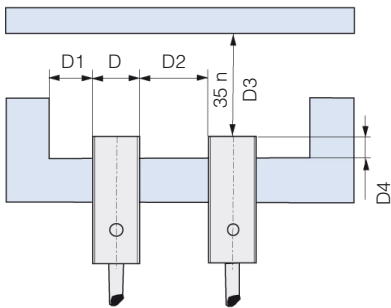

model	D4	D1	D2	D3
AC1/xx-1x	≥ 2 mm ⁽¹⁾	≥ 4 mm	≥ 8 mm	≥ 2,4 mm
AC1/xx-3x	≥ 3 mm ⁽²⁾	≥ 4 mm	≥ 8 mm	≥ 4,5 mm

⁽¹⁾ ≥ 3 mm without ferro-magnetic material
⁽²⁾ ≥ 4 mm without ferro-magnetic material



Proximity Sensors
Catalogue



CAT3EAC1374001 DATASHEET AC1 ENGLISH ED.01/2014

All information written in this catalogue are subject to modifications without notice.
They don't represent any obligation for M.D. Micro Detectors

Any variation will be implemented in this catalogue and its electronic version, available on the corresponding
page of M.D. Micro Detectors website:
www.microdetectors.com